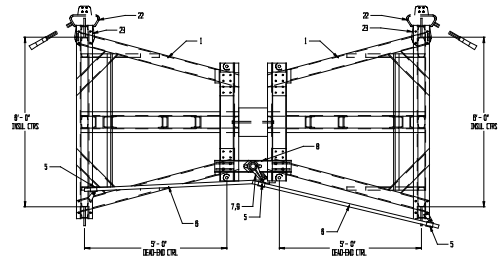

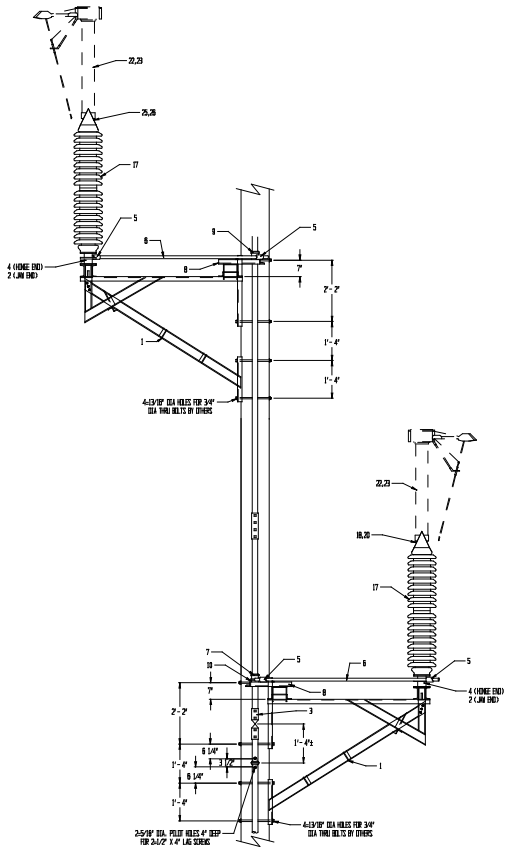

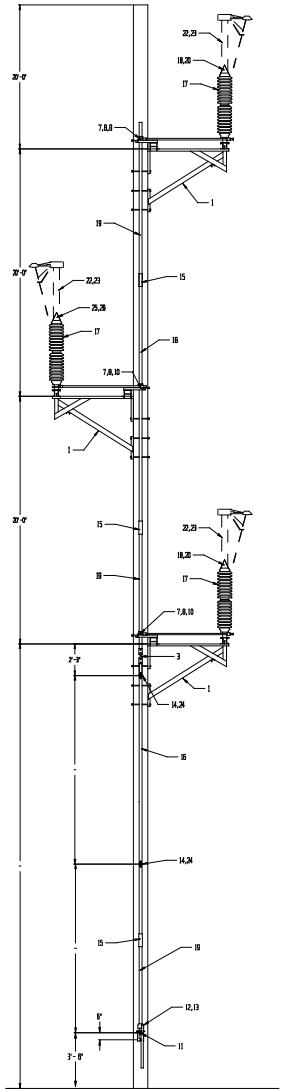



14-PIPE GUIDE MOUNTING DETAIL



11-UPER MTG BRKT DETAIL



12,13-OPERATOR HANDLE DETAIL



18,20,21-138 KV BLADE ASSY, RIGHT HAND SHOWN

QUANTITY						PART	MATERIAL	ITEM	DESCRIPTION
			1	1		AB576		26	LH JAW ASSY 138KV 1200AMP
			1	1		AB583	COPPER	25	LH BLADE ASSY 138KV 1200AMP
			4	4			GALV	24	LAG 1/2 x 4
			3	-		A4888	ALUM	23	CONDUCT MOUNTING PLATE(OPTIONAL, INCLUDED WITH ITEM #22)
			3	-		138UTTM-41B8B		22	TECO RIPTER (OPTIONAL)
			-	3		CD0X8F0ZDMG	GALV	21	CONDUCT JAW MOUNTING PEDESTAL
			2	2		AB576		20	RH JAW ASSY 138KV 1200AMP
			3	3		WR08L180	GALV	19	UPER PIPE 2" SCH. 80 x 18'- 0"
			2	2		AB582	COPPER	18	RH BLADE ASSY 138KV 1200AMP
			6	6		SEE ORDER		17	INSULATOR
			2	2		WR08L180	GALV	16	UPER PIPE 2" SCH. 80 x 22'- 0"
			3	3		AB258	GALV	15	PIPE COUPLING
			2	2		AB257		14	P-GUIDE ASSY (FLATTEN 164)
			1	1		AB269	ALUM	13	LIFTING PLATE ASSY
			1	1		AB265	GALV	12	UPER ASSY
			1	1		CDA2208X4	ALUM	11	UPER BRKT
			2	2		CD1414A1B	ALUM	10	PHASE GUIDE TIP
			1	1		AB247		9	T-BEARING ASSY
			3	3		CD1B1B0A	ALUM	8	T-BEARING/PHASE GUIDE BRKT
			3	3		AB256	GALV	7	7" LEVER ASSY
			3	3		WR08L180	GALV	6	BEARER ROD 1" SCH. 80 x 7'- 0"
			6	6		AB253	GALV	5	1" CLEVIS ASSY
			3	3		AB241	ALUM	4	PIVOT ASSY (4B3 BHB)
			1	1		AB277	GALV	3	PIPE TEE PIPE 11-ZONE ASSY
			3	3		CD1T8D0DMGH	GALV	2	INSULATOR PEDESTAL
			3	3		AB323	GALV	1	1CD-138 FRAME ASSY

DESCRIPTION

SHIPPING INFORMATION

TO:

CUSTOMER P.O.#

SERIAL NUMBER:

REVISIONS	DATE	BY	MARK

138 KV — 1200 AMP

1CDT13812/1212 SIDE BREAK SWITCH ON LAMINATED WOOD POLE

TURNER ELECTRIC CORPORATION
FAIRVIEW HEIGHTS, IL., USA

DRAWING # SK951112

SHEET 1 OF 1

BY	DATE
TONY D	11-1-95
APP'D BY	DATE